

## Sheet Information for DICE6

DICE6

LCG-1207

- Input Voltage: AC 100V-264V/47-63HZ
- Output voltage: DC24V
- Consume: 84W
- Lamp Type: LED(12W)
- Lamp Spec: RGBAW+UV 6-in-1 LED x 7PCS
- Life Span: 50000hours
- Constant Current driver: 400mA
- PWM Dimmer:» 400HZ (16666 steps)
- Control Signal: DMX512, sound activated, auto run
- Control Mode: stand alone/ sound activated/Master and slave
- Channel: 3CH、 6CH、 8CH、 10CH、 11CH
- Color Effect: RGBAWUV mixing
- Function Effect: dimmer, strobe, gradual change, sound activated
- Cooling Mode: fan
- Housing: Die-casting Aluminum
- Protecting Rate: IP20
- Beam Angle:25°/45° for Option
- Anti-electricity Intension: 1.5KV



- Insulation Resistance: > 2 MΩ
- Size: 193\*123\*179mm
- N.W: 2 Kg

### Standard Accessories:

Power-in Cable: 1pcs      DMX Signal Cable: 1pcs      Power-out Connector: 1pcs

### Optional Accessories:

Barndoor: 1set      Gel Holder: 1set      Disffuser: 1set

### Effect:

Each color of LED with 32-bit, 16666 grades dimming

Dim 0%-100%, Strobe、 gradual change、 jumping change and etc.

### Control and Programming:

DMX512 Controller,3-pin Interface, 4 button set DMX ID address with led display

Auto run , sound activated, master slave, interconnected multi-machine control




Channel: 3CH、 6CH、 8CH、 10CH、 11CH

### Packing(Caton/Flightcase):

52\*48\*31CM/8PCS/Carton

G.W.: 20KGS

Size:

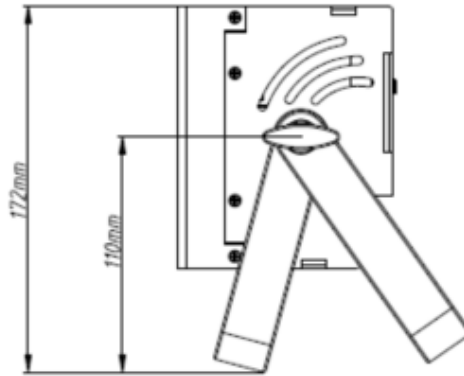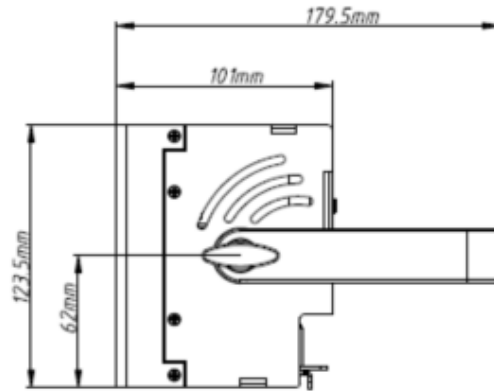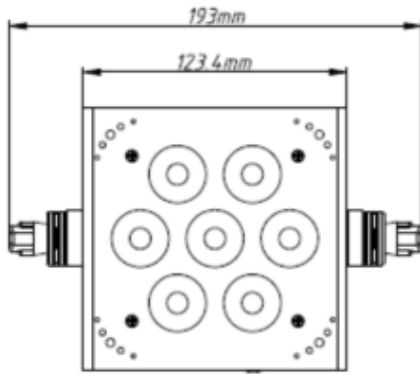

# Light Output:

RGBAWU	8242	909	374.5	134
R	1555	170	69.2	23.2
G	2402	308	127	45.2
B	409	45	18.6	5.9
A	1374	150.9	61.6	21.2
W	4032	422	169.5	58.6
U	9.8	1.5	0.7	0.4

